

PRODUCT DATA SHEET

BIA-INOX45CORE 808393



PRODUCT DETAILS

The BiANCO NXT INOX45 is a stainless steel jet pump with an internal venturi which enables water to be drawn from below ground level.

Equally comfortable pumping from a tank, boosting low pressure water supply or working in conjunction with a rainwater changeover device.

Supplied with a pre-wired NXT CORE pressure controller, connect the inlet and outlet pipes, fill the pump with water and you're ready to go.

APPLICATIONS

- Household water supply small dwellings
- Light garden irrigation
- Water transfer
- Washing systems
- Pressure boosting

FEATURES


- Pump controller pre-set to start once the pressure falls below 2.2 bar. Button press user adjustment of start pressure
- Corrosion resistant pump body, diffuser and impeller to ensure pump durability
- High quality bearings and mechanical shaft seal
- 240V single phase TEFC motor with in-built auto reset thermal overload to prevent the pump from overheating
- Automatic pump starting, stopping and restart after power loss and/or water loss
- Inbuilt dry-run protection

TECHNICAL DATA

OUTPUT POWER (KW)	0.45kW P2			
MAX. HEAD [M]	40M			
MAX. FLOW L/MIN	58 l/min			
Pump: 8 bar, Controller 10 bar				
LIQUID TEMPERATURE	2 - 40 deg C			
MOTOR	Asynchronous TEFC			
MOTOR INSULATION	F Class insulation			
MOTOR PROTECTION	In-built thermal overload			
PROTECTION CLASS	IPX5			
PRESSURE TANK	0.3 litre controller volume 3, 8 or 18 litre recommended			

RATED VOLTAGE	220 - 240V 1Ph 50 Hz				
RATED CURRENT	3.5A 10uF 450V				
CAPACITOR					
POWER CABLE	1.5m long 10 amp rated H05 flex 10 amp 3 pin plug				
AUTOMATIC OPERATION	Yes - NXT CORE				
PUMP BODY	304 Grade Stainless Steel Composite impeller / diffusers Silicon Carbide/Carbon 370 X 185 X 434MM				
INTERNALS					
MECHANICAL SEAL					
PACKAGE DIMENSION					
GROSS WEIGHT (KG)	11kg				


CURVE

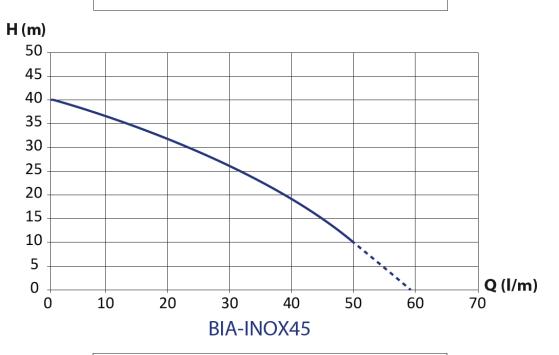


DIMENSIONS

Height incl Controller

Approx 390mm





Model	DN1	Dn2	L (mm)	W (mm)	H (mm)	L1 (mm)	W1 (mm)	H1 (mm)
Inox 45	G1"	G1"	337	180	181.5	78	140	90

WARRANTY / CERTIFICATIONS









