


Ultraviolet Water Systems from VIQUA

The **PROFESSIONAL family** of compact UV systems provide a **reliable** and **economical** way to treat drinking water in virtually any residential or light commercial application. VIQUA's products have been designed and tested to ensure quality drinking water is at everyone's finger tips.

Regardless of your need, there is a VIQUA system to suit your requirements. VIQUA offers third-party validated systems, ranging in flow rates from 10 GPM to 50 GPM.

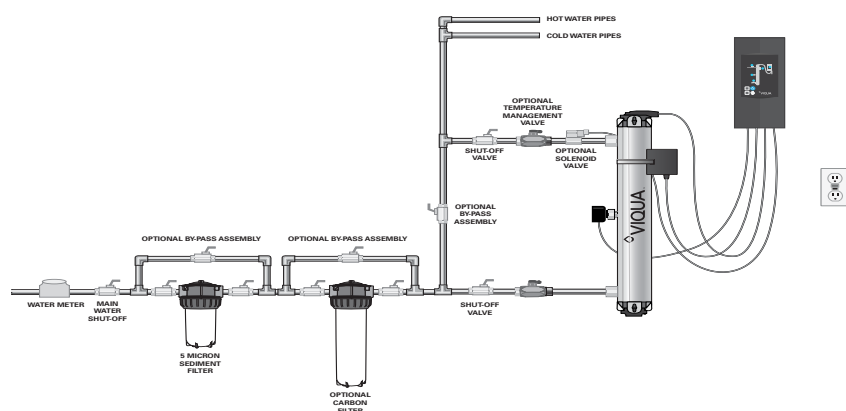

Features of VIQUA PRO50 UV water systems

- Validated in accordance with the USEPA UVDGM 2006 standard to inactivate Cryptosporidium and Giardia.
- The CoolTouch Fan significantly reduces water temperature and does not waste any water.
- For the sleeve bolts a quarter-twist to the positive stop and you're done. No tools, no risk of over-tightening.
- Like a standard plug - no more grounding wires!
- The optional plug-and-play solenoid valve stops water flow in the event that water treatment is compromised.
- Improved sensor ensures safe UV levels are maintained.
- The VIQUA systems use a revolutionary lamp with twice the output of current high-output lamps, giving you compact single-lamp systems that are half the size of their predecessors.
- Our revolutionary amalgam lamps reduce maintenance requirements by lasting up to 2 years.
- Intuitive Interface - a picture is worth a thousand words.
- With plug-and-play color coded connections, it's as easy as "connect the dots."
- The optional COMMcenter displays UV dose and can monitor up to 9 UV systems.

Specifications



MODEL	PRO50 (660003-R)
FLOW RATES (@ 75% UVT)	
≤ 51.2 USGPM	3.0-log Cryptosporidium & Giardia inactivated credit, based on MS2
≤ 71.9 USGPM	3.0-log Cryptosporidium & Giardia inactivated credit, based on T1
≤ 81.4 USGPM	2.5-log Cryptosporidium & Giardia inactivated credit, based on T1
DIMENSIONS	
Chamber	41" × 4" (103 cm × 10 cm)
Controller	13" × 6.5" × 4.5" (33 cm × 16.5 cm × 11.5 cm)
Inlet/Outlet Port Size	2" MNPT
Shipping Weight	31 lbs (14 kg)
ELECTRICAL	
Voltage	100–240V / 50/60 Hz
Power Consumption	230 W
Maximum Operating Pressure	125 psi (8.62 bar)
Influent Water Temperature	2–40°C (36–104°F)
FEATURES	
Visual “Power On”	YES
Chamber Material	316L SS
Visual Lamp Life Remaining	YES
Audible Lamp Failure	YES
Audible Lamp Replacement Reminder	YES
UV Sensor	YES
Flow Meter	NO
Cool Touch Fan	YES
Solenoid Valve	Optional (410888-R)

Replacement Parts		Water Quality Parameters		
602856 – UV lamp	650580 – sensor	Hardness	Iron	Tannins
602976 – quartz sleeve	660020-R – power supply	< 7 grains (120 mg/L)	< 0.3 mg/L	< 0.1 mg/L

To learn more about the brands and affiliates of Trojan Technologies, please visit www.trojantechnologies.com





© 2023 Trojan Technologies Group ULC. No part of this publication may be reproduced, stored in a retrieval system, or transmitted in any form or by any means without the written permission of Trojan Technologies Group ULC. The products described in this publication may be protected by one or more patents in the United States of America, Canada and/or other countries. (0823)